


Pend. lum. with darkl. refl. opt. 2/54W, for T16 lamps, with electronic ballast. Unique and easy Miral quick-fit technology. Luminaire with lamps with colour rendering  $Ra > 80$ , colour temperature 4000 K. The housing is made of white-painted roll-formed sheet steel. For continuous-row systems, the white plastic end pieces can be replaced easily on site with continuous-row connectors. Electrical supply via the terminal mounted on the top of the luminaire and accessible from outside, and the wide cable duct for connecting cables and through-wiring. Cord suspension kit comprising 1x ceiling rose and 2x cords of length 1000mm; electrical terminals included in suspension kit. BIVERGENZ® plus reflector louvre made of highest-grade aluminium in highly reflective anodised finish for enhanced reflectivity, including UniQue® vane technology for maximum efficiency and glare control to European Standard EN12464 for DSE workstations. Luminaire wired with halogen-free leads. Dimensions 1200 x 187 x 73 mm; weight: 2.8 kg.




ZS\_MAL\_F\_2\_T16anbau\_dark\_seil.jpg

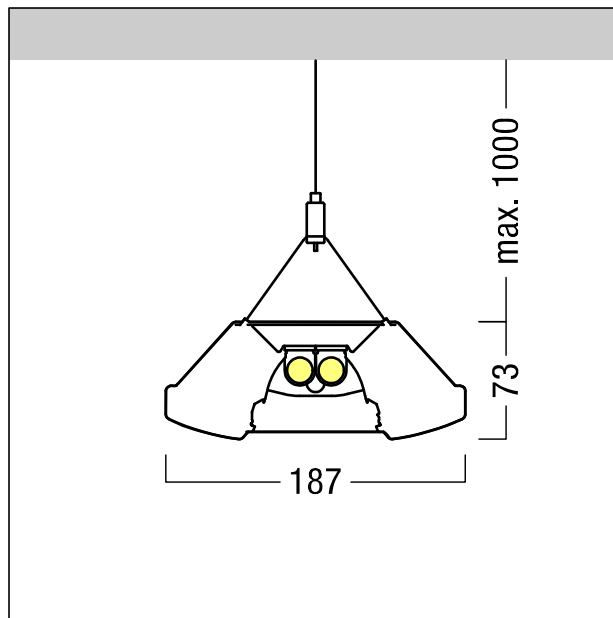

ZS\_MAL\_M\_2\_FA2-ID.wmf

## Křivka svítivosti

## STD – standard

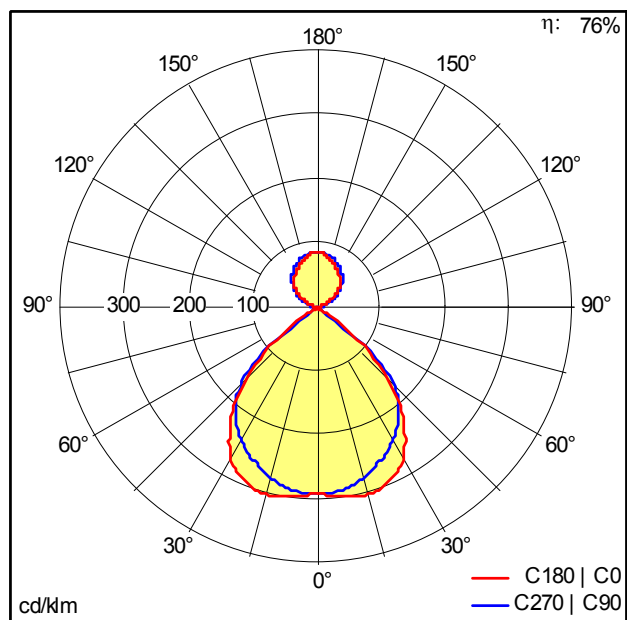

D28622U8.ltd

- Světelný zdroj: 2 x T16 / 54W
- Světelný tok\*: 6791 lm
- Světelný výkon svítidel\*: 59 lm/W
- Index podání barev - CRI min.: 80
- Předřadník: 1 x 22185156 PC 2x54 T5 PRO Ip
- Příkon svítidla\*: 114.5 W  $\Lambda = 0.99$
- CELMA EEI: A2
- Kategorie údržby: B - Reflektor otevřený nahoře